

# DEiTECH

Energy saving refrigeration dryers  
0,3 – 27,0 m³/min

pure energy



- ✓ New high efficiency heat exchanger
- ✓ Highest energy savings
- ✓ Minimum pressure drops
- ✓ Lowest environmental impact
- ✓ Reduced carbon footprint
- ✓ Easy installation
- ✓ Easy serviceability
- ✓ Maximum reliability

Purifying your compressed air,  
increasing your efficiency.



Cooling, conditioning, purifying.

# DRY ENERGY - ITECH



WITH THE INTRODUCTION OF **DE ITECH**, THE NEW GENERATION OF ENERGY-SAVING REFRIGERATION DRYERS, MTA NOT ONLY RENEWS ITS PRODUCT OFFERING FOR THE COMPRESSED AIR TREATMENT BUT ALSO REINTERPRETS THE CONCEPT OF THERMAL STORAGE OPERATION, THAT MADE THE INTERNATIONAL SUCCESS OF THE DE HYBRID DRYERS. THE NEW **IMPULSE TECHNOLOGY** OFFERS IMPORTANT ADVANTAGES IN TERMS OF ENERGY SAVING, RELIABILITY AND OPERATING COSTS AS THE **DE ITECH** DRYER IS ABLE TO ADAPT ITSELF TO THE REAL NEEDS OF THE COMPRESSED AIR SYSTEM. THE REGULATION SYSTEM OF THE DRYER CONTROLS THE DRYER OPERATION GRANTING THE MOST ENERGETICALLY EFFECTIVE METHOD OF COMPRESSED AIR DRYING, ACHIEVING HIGH ENERGY SAVING AND ENSURING AT THE SAME TIME AN EXCELLENT DEW POINT STABILITY ALSO IN DYNAMIC CONDITIONS.



## Enhanced Energy Savings

New 3-in-1 high efficiency heat exchanger with optimized fluid dynamics useful to keep the pressure drops to a minimum level. Advanced drying capacity control by impulses or by thermal storage effect. Enhanced energy savings (up to 80% compared with hot gas by-pass dryers).



## Reliable Drying & Separation

The stainless steel demister separator efficiently removes the condensed moisture at all airflows (unlike centrifugal separators). This ensures a high grade of drying all the time.



## High Operating Limits

High maximum inlet temperature  $+70^{\circ}\text{C}$  (DEiT 003-080)  $+60^{\circ}\text{C}$  (DEiT 100-270) and maximum ambient temperature ( $+50^{\circ}\text{C}$ ) ensure a fail - safe operation at all times. High maximum operating pressure (16 barg).




## Easy Installation

Advanced design makes this dryer extremely compact and lightweight. Small footprint and frontal access for all controls and refrigeration components save valuable plant floor space.



## User Friendly

DE ITECH automatically adapts itself to any operating condition, without any need to adjust or switch OFF the dryer. User friendly digital control is standard on all the models and shows all the main parameters, providing warnings and alarms to ensure correct dryer operation.

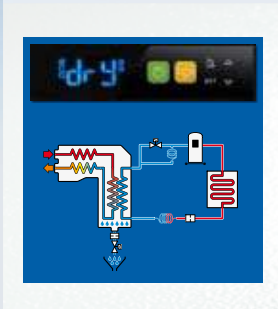



# YOUR BENEFITS IN BRIEF

UNBEATABLE ENERGY EFFICIENCY, LOW PRESSURE DROPS,  
MAXIMUM RELIABILITY, SYSTEM SIMPLIFICATION: THESE ARE THE  
ADVANTAGES OF MTA DRYERS.



## IMPULSE TECHNOLOGY ENERGY SAVING

This revolutionary design matches energy consumption to the work load to achieve energy savings while in operation.

Thanks to some sensors placed on the refrigeration and on the compressed air circuits, the microprocessor controls the dryer operation granting the most energetically effective method of compressed air drying.



- For high/medium flows, the dryer applies the Impulse Technology to regulate its drying capacity.
- For low air flows, the dryer utilizes the thermal storage operation.

### IMPULSE TECHNOLOGY FOR HIGH/MEDIUM AIR FLOWS

The refrigerant compressor is permanently ON to achieve a perfect control of the dew point.

The microprocessor controls through "impulses" the opening and closing of a solenoid valve installed on the suction pipe of the refrigerant compressor, in partial load conditions then only a small portion of the nominal refrigerant flows through a by-pass capillary to the compressor.

In partial load conditions the compressor compresses less refrigerant than at peak load and therefore it consumes less energy (refrigerant flow control technology).

### THERMAL STORAGE OPERATION FOR LOW AIR FLOWS

The refrigerant compressor cycles ON/OFF for maximum savings and reliability. Since the refrigeration capacity is greater than the load, the excess capacity cools the all-in-one exchanger that acts like a thermal storage.

#### Reliable Operation

The simple refrigeration circuit, without hot gas by-pass valve, and the careful selection of the materials and components assure long, trouble free service life. The condenser coil is generously sized to maintain efficiency in all environments even at high ambient temperatures.



#### Easy Serviceability

Removable frontal panel assures easy access to the main refrigeration components, thus facilitating maintenance operations also with dryer ON. There is no need of seasonal adjustments unlike hot gas by-pass dryers. Condenser filters standard (DEIT 100-270) prevent mechanical equipment fouling by stopping debris.



#### Guaranteed Quality

All models are individually tested: refrigerant charge and leakage control, microprocessor and safety device setting verification. Leading brand components are used throughout, ensuring long term reliability.



#### Respect of Environment

DE iTECH's energy savings coupled with R134a and R404A non ozone depleting refrigerants, reduce the environment impact minimizing the energy waste. Recyclable and high quality materials ensure respect of environment. and reduced carbon footprint.



#### Robust Design

Heavy duty structure with panels protected by an epoxy polyester powder coating. Electrical panel (DEIT 100 - 270) is IP54 compliant with EN 60204-1 and tested for electromagnetic compatibility in accordance with applicable EMC standards. Phase monitor standard DEIT 165 - 270.




# ENHANCED ENERGY SAVINGS

## ENERGY SAVING COMPARISON

Normally a refrigeration dryer is sized to reach its nominal performance even in the most extreme conditions. In reality, these conditions are rarely achieved and the dryer works at partial load for most of its operating life. This is due to both the high variability of the compressed air flow of industrial plants and for the average operating temperature that normally is lower than the temperature used to select the dryer itself.

Only a dryer capable to adapt its working cycle to the real working conditions can provide a real energy savings.

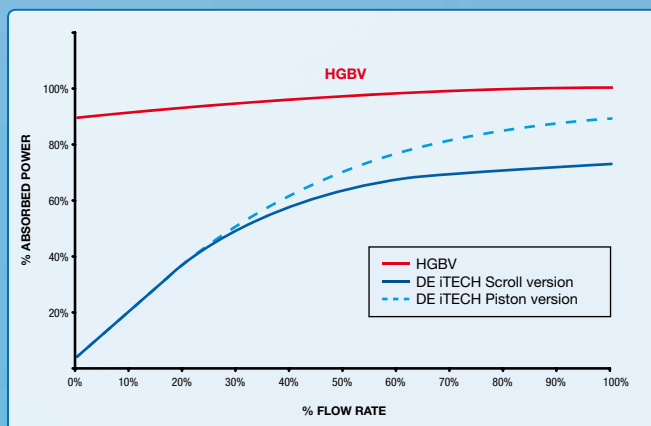

### Hot Gas by-pass Valve (HGBV)

"Non cycling" dryers work with the refrigerant compressor continuously running independently from the inlet condition, using a by-pass valve to control evaporating pressure. Energy consumption remains almost constant also in absence of compressed air flow.

### Impulse Technology (iTECH)

Impulse Technology combines the technologies of regulation by impulses of the refrigerant flow (cooling capacity control for medium/high compressed air flow) and thermal storage effect (low compressed air flow) to produce maximum energy savings and the lowest dew point.



## ENERGY SAVING CALCULATIONS

### Productivity Savings

Compressed air networks rarely operate at full load. Air compressors typically run at 70% – 80% of capacity for the first shift operation, further decreasing on second and third shifts because of variable process demands as well as seasonal fluctuations in ambient temperature. DE iTECH saves energy across the full load spectrum and maximizes the bottom line energy savings.


The chart below shows a comparison between a DE iTECH 230 (23 m³/min) and a dryer which uses hot gas by-pass control. The DE iTECH 230 ensures an annual energy saving of 8103 kWh corresponding to a cost saving of 810 € and a reduction on annual CO<sub>2</sub> emissions of 2334 kg.

Compressed Air Flow 23 m³/min	Non Cycling Dryers	DE iTECH 230
Energy consumption per year Kwh	24370	16266
Energy cost per year €	2436	1626
CO <sub>2</sub> emission per year kg	7018	4684
Energy saving per year Kwh	-	8103
Cost saving per year €	-	810
CO <sub>2</sub> emission saved per year kg	-	2334

(\*) 6000 hours/year. Load profile: for 4800 h/year, load = 80%; for 1200 h/year, load = 30%. Energy costs = 0,1 €/ kWh.

### Low Pressure Drops Savings


The pressure drops generated by a refrigerant dryer must be considered as an extra load that must be overcome by the compressed air compressor to ensure the pressure level required. DE iTECH are designed and optimized from the fluid dynamics point of view to keep the pressure drops to a minimum. The graph represents the increase in power consumption (kWh per year) of a screw compressors 132 kW caused by the pressure drops (6000 working hours per year).

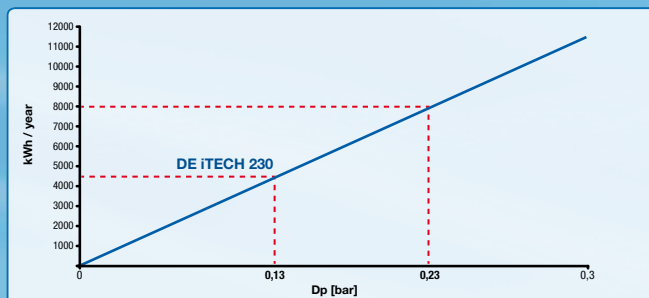

DE iTECH 230 with a pressure drop 0,13 bar provides a considerable energy saving respect another dryer with higher pressure drop 0,23 bar. Annual Energy Saving = (7945 – 4490) kWh/year = 3454 kWh/year. That corresponds to an yearly cost saving of 345 € (energy cost 0,10 € per kWh) and to a reduction on annual CO<sub>2</sub> emissions of 995 kg.

### Total Productivity and Low Pressure Drops Savings

DE iTECH 230 (23 m³/min)	Total savings per year
Total energy saving per year Kwh	11557
Total cost saving per year €	1155
Total CO <sub>2</sub> emission saved per year kg	3329

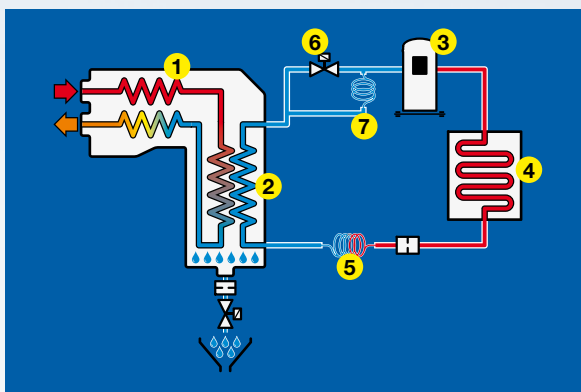

## HOW IT WORKS

Hot moist compressed air enters the Air-to-Air heat exchanger (1) where it is pre-cooled by the dry air leaving the dryer. The refrigerant compressor (3) compresses the refrigerant gas and push it through the condenser (4) where it is condensed in high pressure liquid.


The refrigerant liquid then passes through a capillary (5) that meters it into the evaporator (2) as a low pressure liquid. The microprocessor adapts the working cycle to the real working conditions by controlling through "impulses" the opening and closing of the solenoid valve (6). In partial load conditions only a small portion of the refrigerant flows through the by-pass capillary (7) to the compressor that therefore consumes less energy.

The pre-cooled air enters the evaporator (2) where it is cooled to the required dew point by the incoming refrigerant liquid that changes phase and becomes a low pressure gas suitable to continue the process as it returns to the suction side of the refrigerant compressor (3).

The exiting cold dry compressed air then returns to the Air-to-Air heat exchanger (1) where it is reheated by the incoming air, to prevent sweating in your plant.



## HIGH EFFICIENCY HEAT EXCHANGER

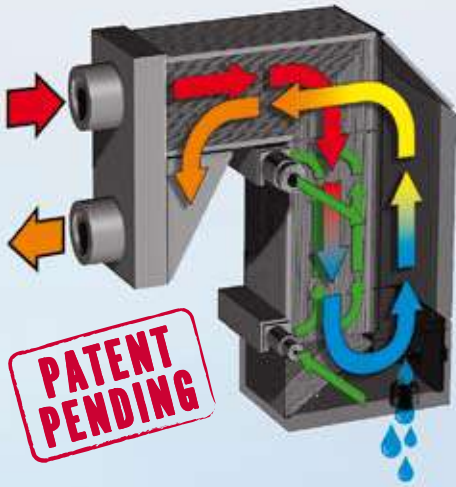

### NEW ADVANCED 3-IN-1 HEAT EXCHANGER

3-in-1 compact aluminium heat exchanger including an Air-Air heat exchanger, the evaporator and a separator combined in a single module.

This advanced heat exchanger has been engineered specifically to maximize the heat transfer coefficient and to guarantee industry leading pressure drops.

#### Air-to-Air Heat Exchanger

Hot and moist air enters the Air-to-Air heat exchanger where it exchanges heat in total counter flow with the outgoing cold air. Precooling saves energy by reducing the heat load on the evaporator section.

#### Evaporator (Air-to-Refrigerant Heat Exchanger)

The pre-cooled air enters the evaporator where it is cooled to the required dew point by exchanging heat in counter flow with the evaporating refrigerant, allowing maximum thermal exchange. The dew point temperature is held within its optimum performance range by the microprocessor even under differing ambient conditions.

#### Demister Separator

After cooling the cold air enters the high efficiency stainless steel separator where the condensate is removed by a demister falling into the generously dimensioned drainage chamber or sump for disposal through the microprocessor controlled drain.

The cold dry compressed air passes through the secondary side of the Air-to-Air heat exchanger where it is reheated by the hot inlet air it is precooling. Reheating prevents down-stream pipe sweating.

## HIGH-PERFORMANCES CONDENSER

The air-cooled condenser is designed to ensure operation up to 50 °C external temperature and to achieve very high energy efficiency values. DEIT 003 – 032 are supplied with tubeless condenser with steel fins protected by a double layer dipping painting. DEIT 040 – 270 are equipped with a condenser coil with copper tubes and aluminium fins. Thanks to the ducted condenser coil, the maintenance activities are possible also with dryer ON. Condenser filters standard on DEIT 100 – 270.

## REFRIGERATION COMPRESSORS FULLY HERMETIC

Piston compressors (DEIT 003 – 140) ensure high reliability and long service life.

Scroll compressors (DEIT 165 – 270) offer reduced energy consumptions, low vibrations, less moving parts and high reliability.


## ENVIRONMENTALLY FRIENDLY REFRIGERANTS

R134a refrigerant: DEIT 003 – 080


R404A refrigerant: DEIT 100 – 270

## HIGH EFFICIENCY 3-IN-1 HEAT EXCHANGER

3-in-1 compact aluminium heat exchanger including an Air-Air heat exchanger, the evaporator and a separator combined in a single module.

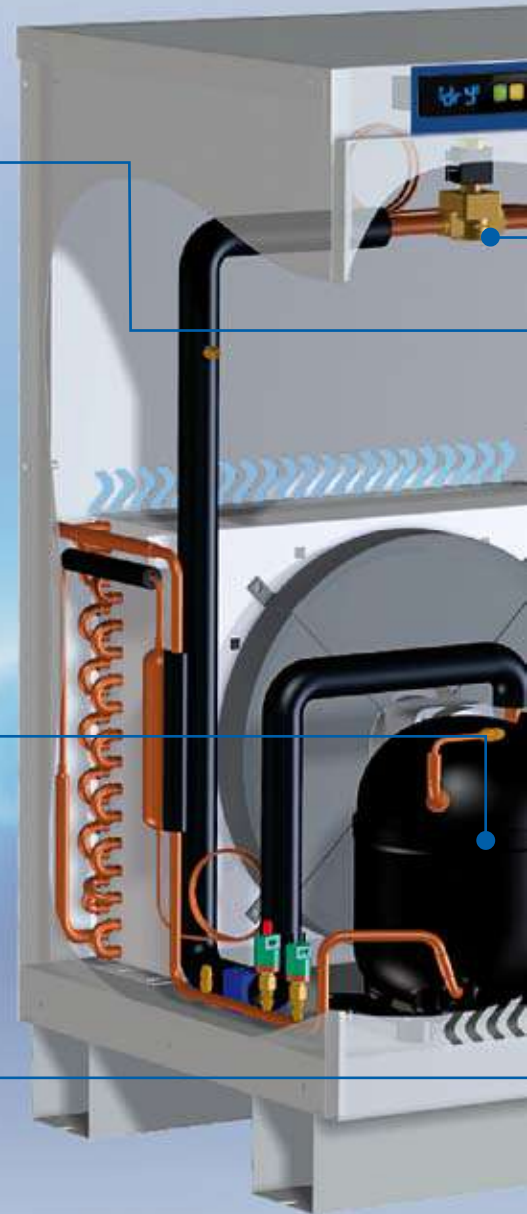

Cooling, conditioning, purifying.

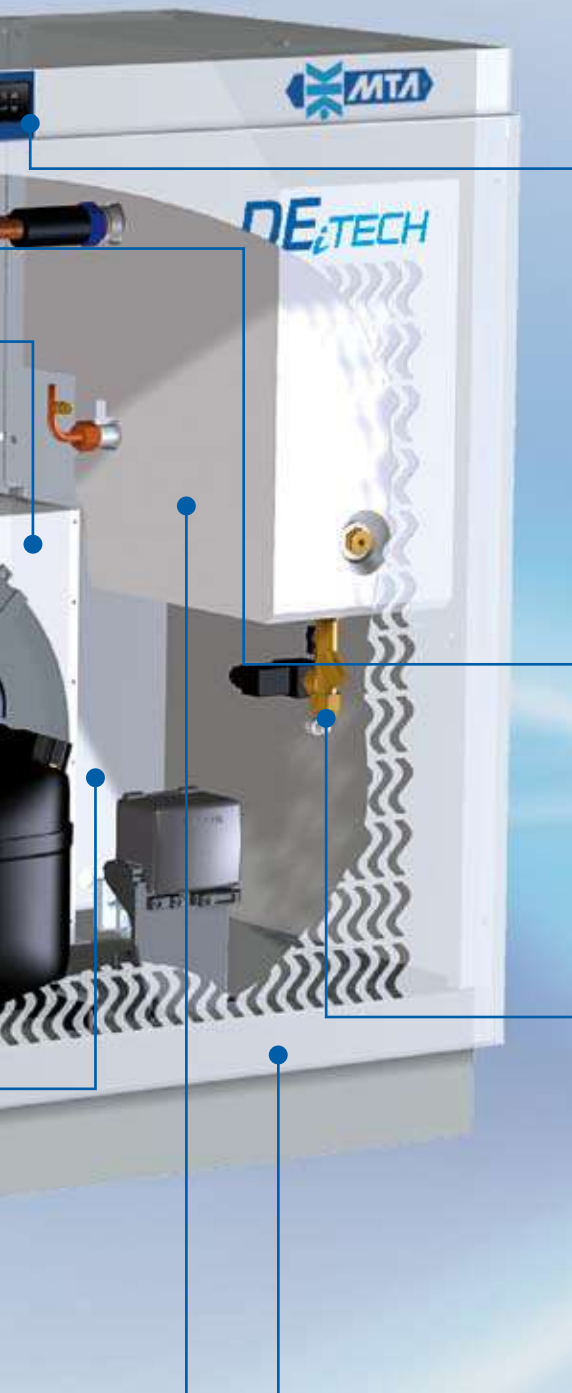

## ELECTRIC POWER AND CONTROL PANEL

The control section is electrically isolated from the power section through a transformer. On DEiT 100 – 270 the power section is fitted with an interlocked door main switch to prevent access while power supply is ON. Electrical equipment is compliant with EN 60204-1 and electrical panel protection degree IP54 compliant with EN 60529 (DEiT 100 – 270). The dryer is tested for electromagnetic compatibility in accordance with applicable EMC standards. A phase monitor (DEiT 165 – 270) provides protection against phase loss and phase reversal.

## IMPULSE TECHNOLOGY

The microprocessor adapts the working cycle to the real working conditions by controlling through “impulses” the opening and closing of the solenoid valve.

## CONDENSATE DRAINS

All the dryers have microprocessor controlled drains. The drain open time and cycle time are fully adjustable and the settings can be locked in to avoid tampering. Zero loss drain (option): a level sensor measures the level of the condensed moisture and automatically opens a valve to drain it off, preventing any pressure loss.

## ROBUST CABINET AND STRUCTURE

Heavy duty structure with panels protected by an epoxy polyester power coating RAL 7035. Simple and safe handling by forklift or pallet truck.

## ADVANCED DIGITAL CONTROL

DEiTECH features advanced microprocessor control technology, with all models fitted with easy to use digital controls. A comprehensive digital display keeps the user fully informed. Maintenance operations are simplified, and remote supervision RS485 can easily be supplied.



- The display shows continuously with icon-based menus the following parameters:
  - Status of the dryer (OFF/dry/hdP);
  - Status of the compressor;
  - Status of condensate drain;
  - Energy saving level;
  - Alarms.
- 3 coded alarms ensuring faultless dryer operation.
- Programmable user alarm.
- Service warning, informing user that preventive maintenance should be carried out.
- Condensate drain control and programming, including manual drain test function.
- Remote ON/OFF function.
- Potential-free general alarm contact for remote alarm indication.
- Possibility to connect the dryer to a supervisor system via RS485 Modbus (option).



IT IS MANDATORY TO INSTALL A PRE-FILTER (MIN. FILTRATION GRADE P 3µM) TO PREVENT MODULE AND DRAINER CLOGGING.

# PRODUCT SPECIFICATIONS

Model	Airflow		Nominal pressure drop bar	Power supply	Nominal absorption power kW	Air connections Rp	Overall dimensions (mm)						Weight (Kg)
	m³/h	m³/min.					A	B	C	D	E	F	
DEIT 003	18	0,3	0,02	230/1/50	0,12	3/8"	319	298	390	70	32	353	18
DEIT 005	30	0,5	0,05	230/1/50	0,16	3/8"	319	298	390	70	32	353	18
DEIT 007	42	0,7	0,09	230/1/50	0,19	3/8"	319	298	390	70	32	353	19
DEIT 009	54	0,9	0,05	230/1/50	0,19	1/2"	359	298	415	70	32	367	22
DEIT 012	72	1,2	0,08	230/1/50	0,29	1/2"	359	298	415	70	32	367	22
DEIT 018	108	1,8	0,04	230/1/50	0,35	1"	380	514	625	70	76	480	35
DEIT 026	156	2,6	0,08	230/1/50	0,47	1"	380	514	625	70	76	480	39
DEIT 032	192	3,2	0,12	230/1/50	0,56	1"	380	514	625	70	76	480	42
DEIT 040	240	4,0	0,12	230/1/50	0,74	1"	680	511	860	80	79	685	68
DEIT 050	300	5,0	0,07	230/1/50	0,78	1 1/2"	680	511	860	120	96	646	75
DEIT 060	360	6,0	0,10	230/1/50	0,84	1 1/2"	680	511	860	120	96	646	76
DEIT 070	420	7,0	0,09	230/1/50	0,95	1 1/2"	755	555	995	150	104	751	93
DEIT 080	480	8,0	0,11	230/1/50	1,10	1 1/2"	755	555	995	150	104	751	94
DEIT 100	600	10,0	0,14	230/1/50	1,53	2"	1031	799	1039	150	143	747	180
DEIT 120	720	12,0	0,17	230/1/50	1,84	2"	1031	799	1039	150	143	747	190
DEIT 140	840	14,0	0,08	230/1/50	2,11	2 1/2"	1170	939	1180	200	165	840	235
DEIT 165	990	16,5	0,10	400/3/50	2,24	2 1/2"	1170	939	1180	200	165	840	246
DEIT 190	1140	19,0	0,12	400/3/50	2,55	2 1/2"	1170	939	1180	200	165	840	246
DEIT 230	1380	23,0	0,13	400/3/50	2,96	2 1/2"	1170	939	1180	200	165	840	268
DEIT 270	1620	27,0	0,16	400/3/50	3,33	2 1/2"	1170	939	1180	200	165	840	272

Data refers to the following working conditions: air FAD 20 °C / 1bar A, pressure 7 bar(g), ambient temperature 25 °C, air inlet temperature 35 °C, pressure dew point 3 °C, according to ISO 8573.1 standard humidity class 4.

Weights are net (without packing and for timed drain configuration). Refrigerant fluids: R134a (DEIT 003-080), R404A (DEIT 100 – 270). Protection class IP22. Maximum working pressure 16 bar(g); maximum ambient temperature 50 °C; maximum inlet temperature +70 °C (DEIT 003 – 080), +60 °C (DEIT 100 – 270).

The correction factors in the following table should be used as a guide only; for accurate selection at conditions differing from the above the selection software should be utilised. CAPACITY correction factors (indicative values): CAPACITY = RATED VALUE 7 bar(g) x K1 x K2 x K3 x K4.


working pressure	bar (g)	3	4	5	6	7	8	9	10	11	12	13	14	15	16
correction factor	K1	0,71	0,82	0,90	0,96	1,00	1,04	1,07	1,09	1,11	1,13	1,15	1,16	1,18	1,19

ambient temperature	°C	20	25	30	35	40	45	50						
correction factor	K3	1,05	1,00	0,95	0,89	0,84	0,78	0,72						


pressure dew point	°C	3	5	7	9
correction factor	K4	1,00	1,12	1,24	1,38

air inlet temperature	°C	30	35	40	45	50	55	60	65	70
correction factor	K2	1,23	1,00	0,81	0,66	0,57	0,52	0,48	0,44	0,40


DEIT 003 – 012

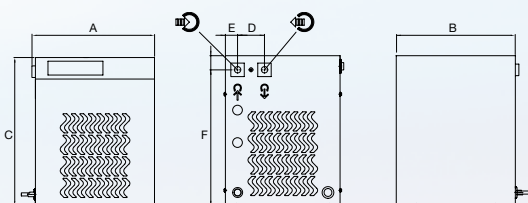


DEIT 018 – 032

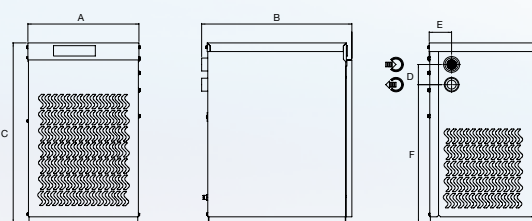

DEIT 040 – 080

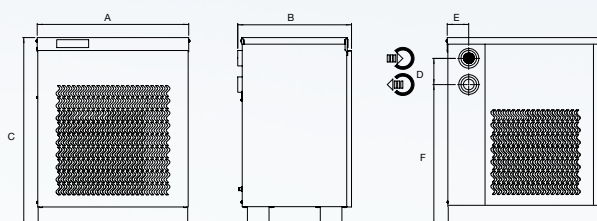

DEIT 100 – 270

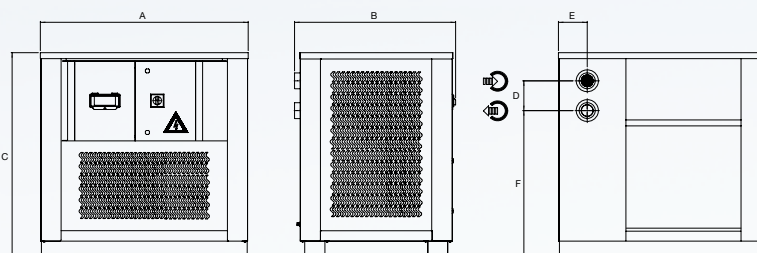

Complete your compressed air treatment system with M.T.A. aftercoolers, separators, filters, adsorption dryers, drains, oil-water separators and chillers.





## ENERGY FOR THE FUTURE

MTA was born over 30 years ago with a clear objective: improving mankind's relationship with two distinct natural resources, air and water, and optimising their transformation into energy sources. And as each application differs, so MTA offers a personalised energy solution perfectly aligned to each individual need. At MTA energy is our business, and improving your relationship with your energy is our aim.

[www.mta-it.com](http://www.mta-it.com)

## STRATEGIC DIVERSIFICATION

MTA covers three distinct market segments. As well as Compressed Air & Gas Treatment solutions, MTA offers products for Industrial Process Cooling, as well as Air Conditioning solutions. MTA is renowned for the innovation it brings into each of these three sectors; in fact our strategic diversification offers our Customers unique benefits unseen in their individual fields.

## FAR REACHING BUT ALWAYS CLOSE BY

MTA is present in over 80 countries worldwide. 6 MTA Sales Companies cover 4 continents. Expert knowledge and an accurate attention to application consultancy and service support guarantees that our Customers can look forward to long term peace of mind and an optimized energy solution. We always remain close to our Customers, so wherever you may be, we are close by.

The data contained herein is not binding. With a view to continuous improvement, MTA reserves the right to make changes without prior notice. Please contact our sales office for further information. Reproduction in whole or in part is forbidden.



Cooling, conditioning, purifying.



MTA is ISO9001 certified, a sign of its commitment to complete customer satisfaction.



MTA products comply with European safety directives, as recognised by the CE symbol.

### M.T.A. S.p.A.

Viale Spagna, 8 ZI  
35020 Tribano (PD) - Italy  
Tel. +39 049 9588611  
[info@mta-it.com](mailto:info@mta-it.com)

### Compressed air & gas treatment

Fax +39 049 9588612

### Process cooling

Fax +39 049 9588612

### Air conditioning

Fax +39 049 9588604

### Milan branch office

Tel. +39 02 95738492

### MTA worldwide

MTA is represented in over 80 countries worldwide. For information concerning your nearest MTA representative please contact M.T.A. S.p.A.

### International Sales Companies:

#### MTA Australasia

Tel. +61 3 9702 4348  
[www.mta-au.com](http://www.mta-au.com)

#### MTA France

Tel. +33 04 7249 8989  
[www.mtafrance.fr](http://www.mtafrance.fr)

#### MTA Germany

Tel. +49 (2157)12402-0  
[www.mta.de](http://www.mta.de)

#### MTA Romania

Tel. +40 723 022 023  
[www.mta-it.ro](http://www.mta-it.ro)

#### MTA Spain

Tel. +34 938 281 790  
[www.novair-mta.com](http://www.novair-mta.com)

#### MTA USA

Tel. +1 716 693 8651  
[www.mta-it.com](http://www.mta-it.com)